

Product Data Sheet


Article number (will be added by Beslag Design):
973680 / 973681 / 973680UT / 973681UT

Produced by KG	Date 2020-01-28	Replaces -	Valid from 2020-01-28
-------------------	--------------------	---------------	--------------------------





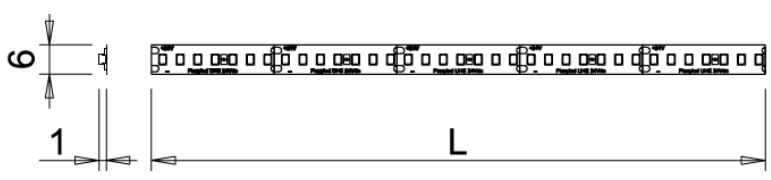


Company information

Company name	Beslag Design	Telephone number	+46(0)431 784 80
Address	Inre Kustvägen 32 SE-269 43 Båstad	Fax number	+46(0)431 784 99
E-mail	info@beslagdesign.se	Web page	www.beslagdesign.se


Product Data



Product name	FlexyLED UHE6 PW
Article No.	973680 (1000mm) / 973681 (2000mm) / 973680UT (1000mm) / 973681UT (2000mm)
Versions	N/A
Description	LED-strip
Cutting distance	Devisible every 25mm
Product material	copper /metahacrylate (PMMA)
Surface finish	White
Dimensions (mm)	
Light source type	280 diods/m, static light SMD LED
Connection type	Micro24
Voltage (V)	24V
Rated power (W)	10W/m
Luminous power at 50cm (lux)	1000lux (973680, 1000mm)
Luminous flux (lm)	NA
Luminous efficiency (lm/W)	82lm/W
Light temperature (K)	3000K
Color rendering index (CRI)	Ra ≥ 80
Beam Angle (°)	100°
Dimmable (Yes/No)	Yes
Driver included (Yes/No)	No
Life span (h)	30.000h - average value (minimum guaranteed complies with the requirements of EU Regulation 1194/2012)
Replaceable light source	No
Insulation degree	III
IP rating	IP20
Compliance-Standards	EN60598-2-1:1989 EN60598-1:2015+A1:2018 EN50581:2012
Compliance-European Directives	2014/35/EU Low Voltage 2009/125/EC Erp (Reg.No1194/2012/UE + Reg. 1428/2015/UE) 2011/65/UE RoHs


Product Data Sheet

Markings	      
Total weight (kg)	N/A
Packaging size (WxDxH)	N/A
Other:	

Light radiation diagram

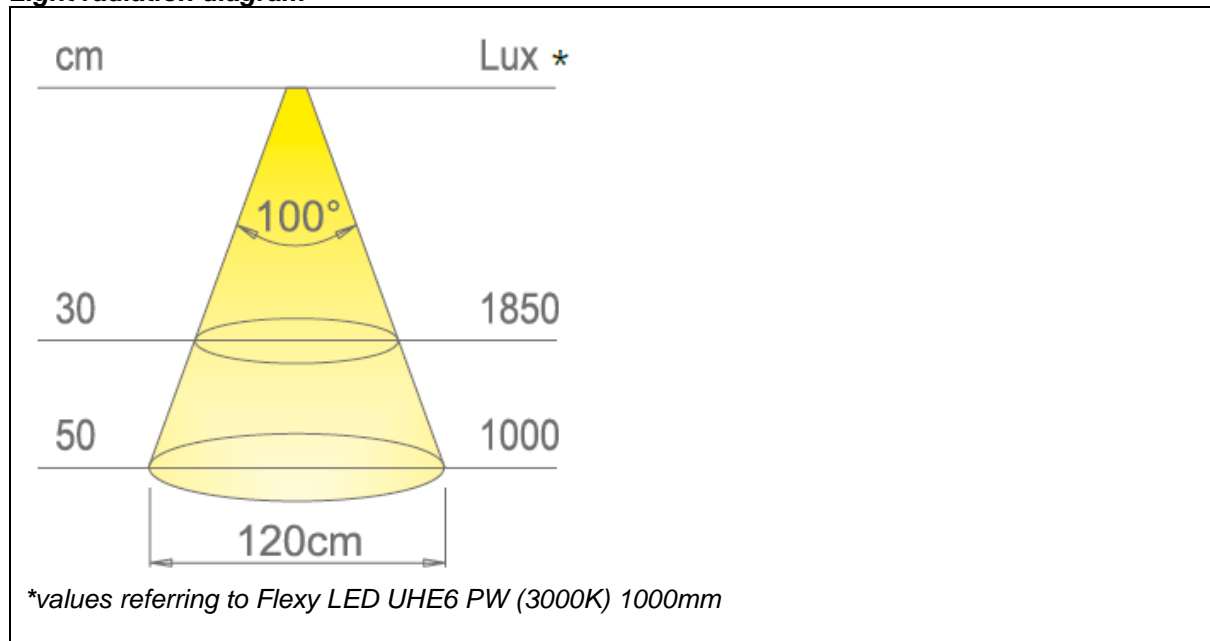

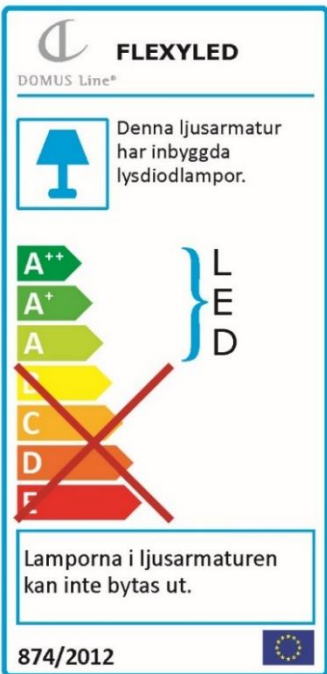Energy label	 <p>FLEXYLED DOMUS Line*</p> <p>Denna ljusarmatur har inbyggda lysdiodlampor.</p> <p>A++ A+ A B C D E</p> <p>LED</p> <p>Lamporna i ljusarmaturen kan inte bytas ut.</p> <p>874/2012 </p>
Care instructions	N/A
Packaging material	N/A
Recycling instructions	Device is subject to the European Community directives 2002/96/CE and 2003/108/CE and shall be handed in at a waste deposit center

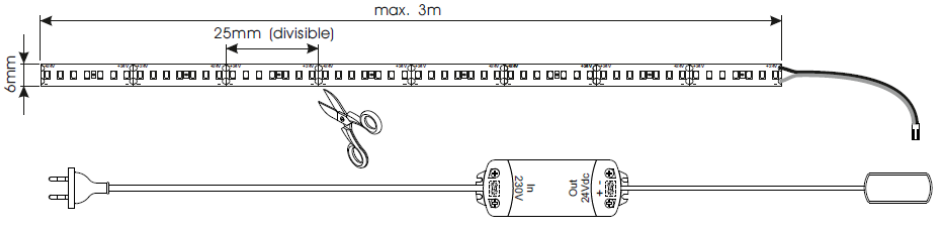Mounting instructions	<p>Fastened with 3M self-adhesive tape or inserted into suitable profile</p>  <p>The diagram shows a lighting strip with a maximum length of 3m. The strip has a width of 6mm and a spacing of 25mm (divisible) between the light points. A transformer is shown below the strip, labeled '230V In', 'Out 24Vdc', and '24Vdc'. A pair of scissors is shown cutting the strip.</p>