






FLEXYLED HE6 D-MWA  

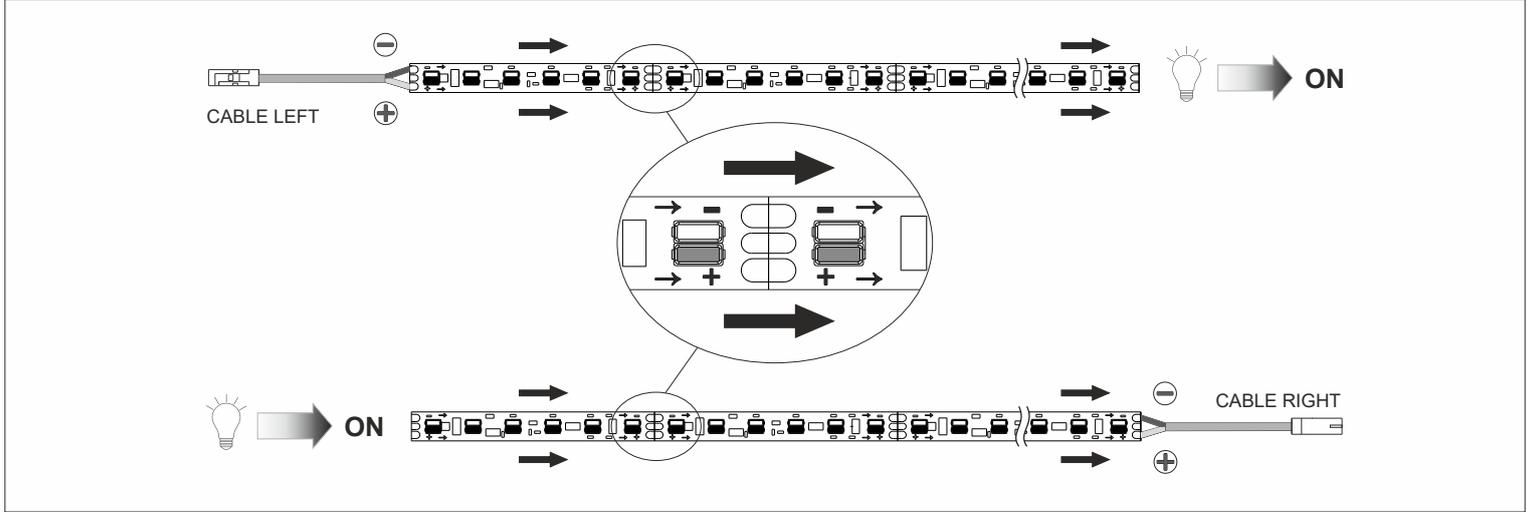




FLEXYLED HE6/HE6B D-MWA  

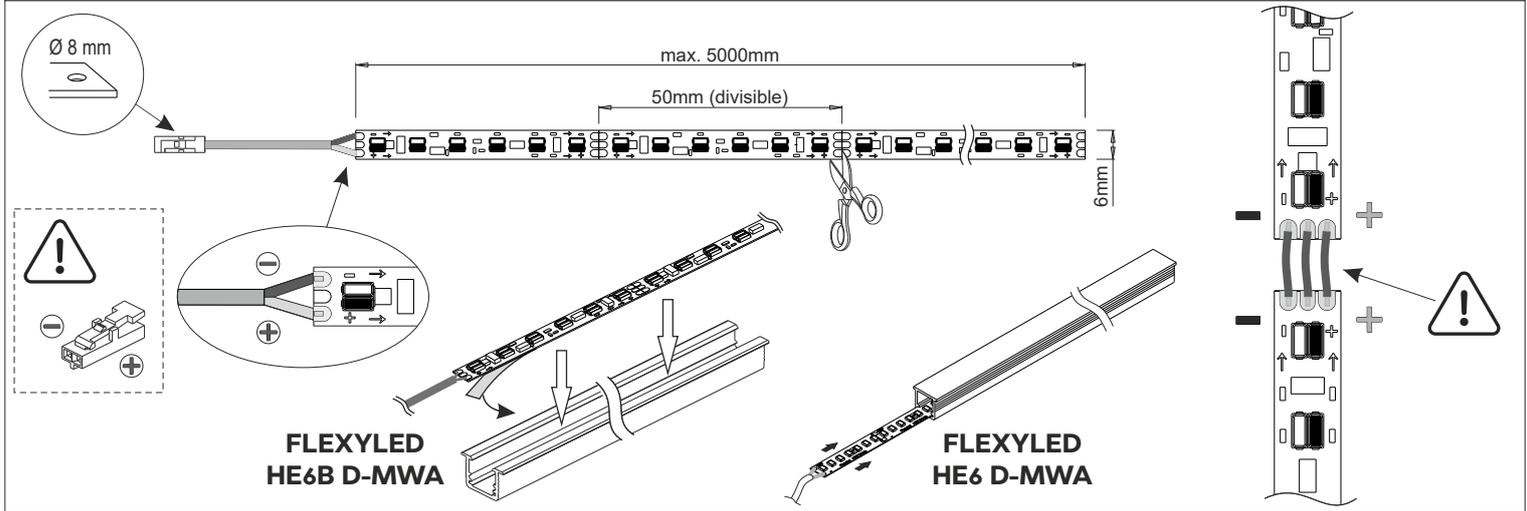

FLEXYLED HE6 D-MWA: wrong connection 

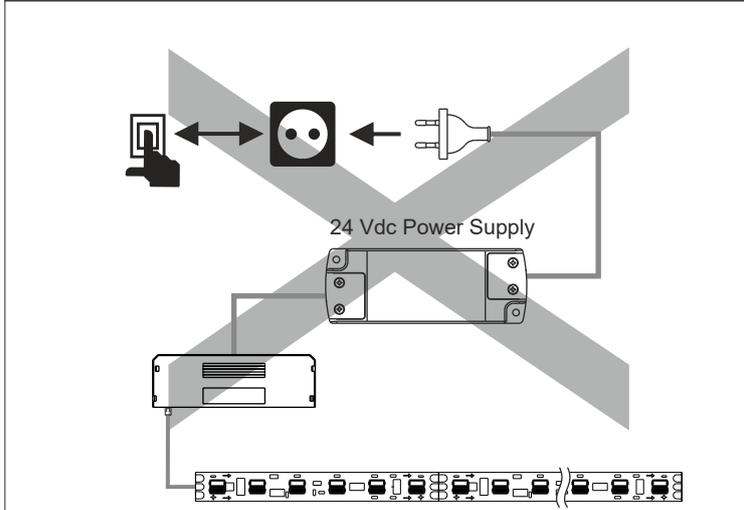

FLEXYLED HE6 D-MWA 

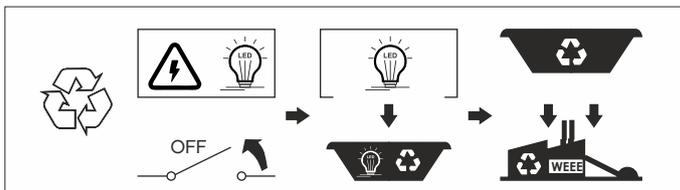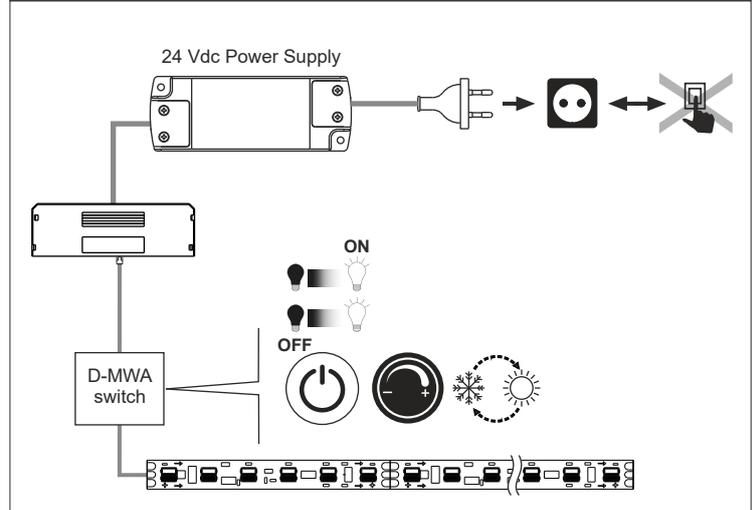

FLEXYLED HE6/HE6B D-MWA

M0011000073_r2.p.1/1



FLEXYLED HE6 D-MWA

flexible linear LED reel without cable

Lenght	Watt	Volt
10m	9,6W/m	24VDC



FLEXYLED HE6 D-MWA PW



flexible linear LED module with cable

Lenght	Watt	Volt
on request	9,6W/m	24VDC



FLEXYLED HE6 D-MWA PW can be configured in custom-length modules in multiples of 50mm (6+6 LEDs, 0.48W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.

FLEXYLED HE6 D-MWA and FLEXYLED HE6 D-MWA PW must be controlled with a compatible D-Motion Wave control system.



Colour appearance	white D-Motion Wave
Colour temperature	2700 - 4000 K
Luminous flux	1054 lm/m
Luminous efficiency	110 lm/W
CRI	Ra 81

FLEXYLED HE6 D-MWA



dual colour wave LED light source

FLEXYLED HE6 D-Motion Wave is a dimmable dual colour light source with progressive switching on and switching off in reverse sequence, developed on a 6mm-wide flexible linear module with 120+120 LEDs/m, designed to be integrated "by sliding" into micro profiles. The light source, divisible every 50mm (6+6 LEDs), is supplied without adhesive base and is only compatible with D-Motion Wave control systems. FLEXYLED HE6 D-MWA is available in 10m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED HE6 D-MWA PW). Power supply not included, to be ordered separately.

